

# REACH-IN REFRIGERATOR

## Model: 2RNHD

Natural Refrigerant R-290 Model

### 2-Section Reach-In Refrigerator with Half Doors



ENERGY STAR® Qualified Commercial Refrigerator

- 2RNHD** - Stainless steel front, aluminum end panels and interior
- 2RNSAHD** - Stainless steel exterior, aluminum interior
- 2RNSSHD** - Stainless steel exterior and interior



## Options and Accessories

(upcharge and lead times may apply)

|                                       |  |
|---------------------------------------|--|
| Stainless steel case back             | Shallow depth (consult factory)  |
| Additional epoxy coated steel shelves | Hinged glass door (consult factory)  |
| Chrome or stainless steel shelves     | Special electrical req. (consult factory)  |
| Heavy duty pilaster strips            | Rehinging of doors (consult factory)   |
| Adjustable legs                       | <b>Correctional Facility Options</b>   |
| Custom laminates                      | <ul style="list-style-type: none"> <li>• One way security screws</li> </ul>          |
| Full doors                            | <ul style="list-style-type: none"> <li>• Locking hasp (lock not included)</li> </ul> |
| Pass-Thru (consult factory)           | <ul style="list-style-type: none"> <li>• Stainless steel mesh cover</li> </ul>       |
| Pan slide assemblies                  | <ul style="list-style-type: none"> <li>• Coverless hinges</li> </ul>                 |
| Wine Rack                             |  |

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, electric condensate evaporator

Expansion valve system

### CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

### MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Off-cycle defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

# Model Specifications

## DIMENSIONAL DATA

|  |                  |
|--|------------------|
| Net Capacity (cubic feet)                          | 48 (1359 cu l)   |
| Width, Overall (inches)                            | 52 (1321 mm)     |
| Depth, Overall (inches)<br>(including handles)     | 35 3/8 (899 mm)  |
| Depth (inches) (less doors)                        | 32 (813 mm)      |
| Depth (inches) (doors open 90°)                    | 55 1/2 (1410 mm) |
| Clear Door Width (inches)                          | 19 3/8 (492 mm)  |
| Clear Half Door Height (inches)                    | 27 1/2 (699 mm)  |
| Height, Overall (inches)<br>(including 5" casters) | 82 1/4 (2089 mm) |
| Number of Doors                                    | 4                |
| Number of Shelves                                  | 6                |
| Shelf Area (square feet)                           | 40.8 (3.8 sq m)  |
| Tray Slide Capacity (per half section)             | 11               |

## REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/3+ |
| Capacity (BTU per hour)*    | 2560 |

## ELECTRICAL DATA

|  |                     |
|--|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Feed Wires (including ground)                  | 3                   |
| Total Amps (International)                     | 8.1 (4.9)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

## SHIPPING DATA



|                              |                  |
|------------------------------|------------------|
| Height - Crated (inches)     | 85 1/2 (2172 mm) |
| Width - Crated (inches)      | 64 (1626 mm)     |
| Depth - Crated (inches)      | 42 (1067 mm)     |
| Volume - Crated (cubic feet) | 133 (3766 cu l)  |
| Weight Std - Crated (pounds) | 433 (196 kg)     |
| Weight SS - Crated (pounds)  | 455 (206 kg)     |

\* Rating @ +25°F evaporator, 90°F ambient  
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
 (varies by country)

# Model Plan Views

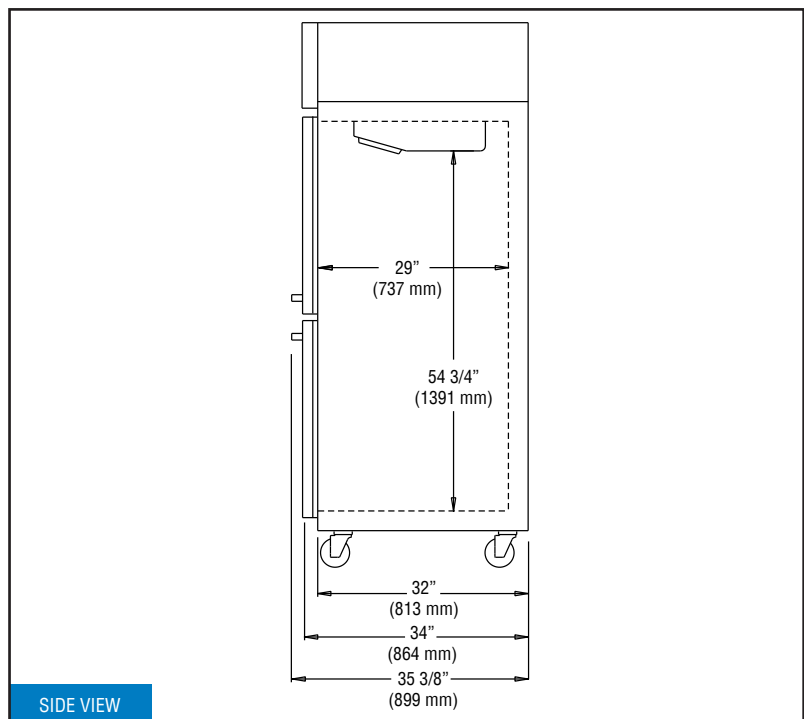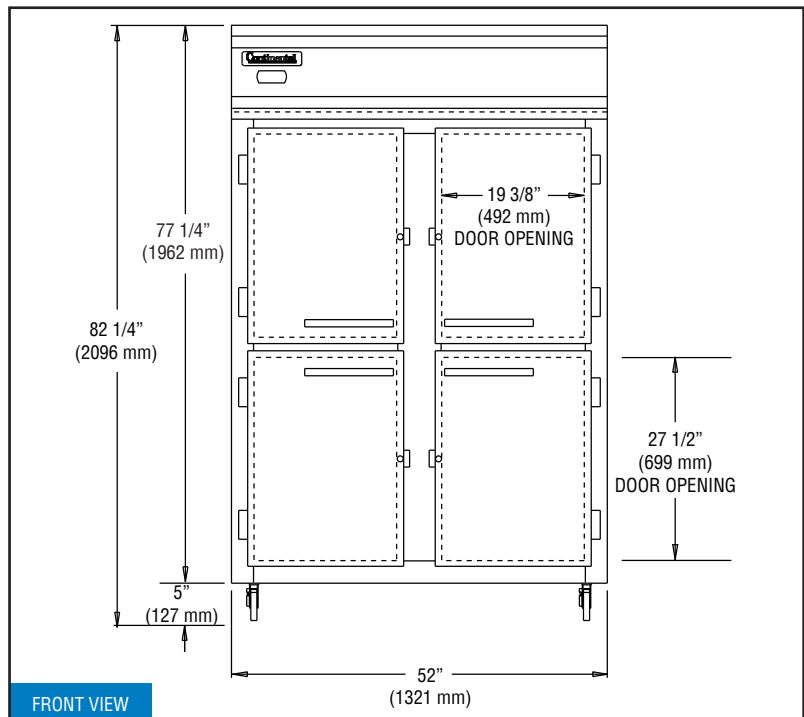

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

